



CB TEST CERTIFICATE

Ref. Certificate No.

NL-19585

IEC SYSTEM FOR MUTUAL RECOGNITION OF TEST CERTIFICATES FOR ELECTRICAL EQUIPMENT (IECEE) CB SCHEME

Issued by:

KEMA Quality B.V.

Product:

Push button switch

Applicant:

ZHEJIANG CHINT ELECTRICS CO., LTD. No.1, Chint Road, Chint Industrial Zone, North Baixiang, Yueqing Zhejiang China

Manufacturer:

ZHEJIANG CHINT ELECTRICS CO., LTD. No.1, Chint Road, Chint Industrial Zone, North Baixiang, Yueqing Zhejiang China

Factory:

ZHEJIANG CHINT ELECTRICS CO., LTD. No.1, Chint Road, Chint Industrial Zone, North Baixiang, Yueqing Zhejiang China

Rating and principal characteristics:

AC-15: 1,9 A / 415 Vac, 2,5 A / 380 Vac, 3 A / 240 Vac, 4,5 A / 220 Vac
DC-13: 0, 27 A / 250 Vdc, 0,3 A / 220 Vdc, 0,55 A / 125 Vdc, 0,6 A / 110 Vdc, 1,6 A / 50 Vdc
Rated conditional short-circuit current: 1000 A
Utilization category:
AC-15 or DC-13
Further ratings see Annex and page 13 of TRF.

Trade mark (if any):

CHINT

Model/Type reference:

NP2 Series

Additional information:

See Annex

Sample of product tested to be in conformity with IEC:

60947-5-1(ed.3);am1

Test Report Ref. No:

3301042.50

This CB Test Certificate is issued by the National Certification Body:

KEMA Quality B.V.
Utrechtseweg 310
P.O. Box 5185
6802 ED Arnhem
The Netherlands

KEMA Quality
a DEKRA company

Signed by: H.L. Schendstok

Date of issue: 2010-12-09

ANNEX


CB TEST CERTIFICATE

Ref. Certificate No. NL-19585


Page 1 of 6

SPECIFICATION OF THE CERTIFIED PRODUCT

Product data

product	:	Push button switch
trade name(s)	:	CHINT
type(s)	:	NP2 Series
rated current (Ie)	:	AC-15: 1,9 A / 415 Vac 2,5 A / 380 Vac 3 A / 240 Vac 4,5 A / 220 Vac DC-13: 0,27 A / 250 Vdc 0,3 A / 220 Vdc 0,55 A / 125 Vdc 0,6 A / 110 Vdc 1,6 A / 50 Vdc
utilization category	:	AC-15 or DC-13
number of poles	:	1 pole or 2 poles
rated voltage (Ue)	:	415 / 380 / 240 / 220 Vac 250 / 220 / 125 / 110 / 50 Vdc
rated conditional short-circuit current	:	1000 A
type of contact elements	:	Form X, Form Y
control switches with direct opening action	:	
mounting hole diameter	:	Φ 22
ambient temperature	:	-5° C - +40 °C
method of mounting	:	single hole mounted push-buttons and indicator lights
degree of protection against moisture	:	IP40 or IP65 for head protection
connection	:	screw type terminals

Explanation of model/ type :

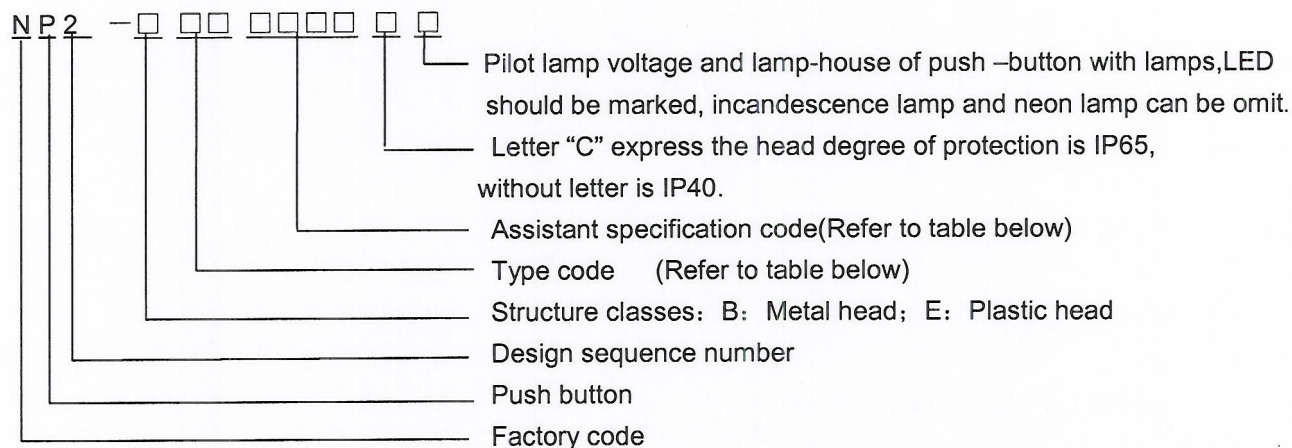

Type code	Assistant specification code		
A: Flush button Spring return L: High button Spring return Letter "Z" behind is self-locking	1: White 3: Green 5: Yellow	2: Black 4: Red 6: Blue	31: With sign I ; 32: With sign O; 34: With sign ↓; 35: With sign ↑; 36: With sign II ; Unsigned button, this two number elided
C: φ40 mushroom button Spring return R: φ60 mushroom button Spring return P: push button with cover Letter "Z" behind is self-locking	1: White 3: Green 5: Yellow	2: Black 4: Red 6: Blue	1: 1NO 2: 1NC 3: 2NO 4: 2NC 5: 1NO&1NC
T: Mushroom button, stay-up, pull to reset, φ40 X: Mushroom button, stay-up, pull to reset, φ60	4: Red		2: 1NC
D: Selector button with rotary knob J: Selector button with rotary handle G: Key operated rotary button	2: Two positions locked 3: Three positions locked 4: Two positions reset 5: Three positions reset 7: Three positions left reset right locked 8: Three positions right reset left locked		1: 1NO 2: 1NC 3: 2NO 4: 2NC 5: 1NO&1NC

ANNEX

CB TEST CERTIFICATE

Ref. Certificate No. NL-19585

Page 3 of 6

S: Mushroom button stay-up, rotated to reset	Turn restoration 4: \varnothing 30 5: \varnothing 40 6: \varnothing 60 Key restoration 7: \varnothing 30 1: \varnothing 40 2: \varnothing 60	3. Green 4. Red 5. Yellow	2: 1NC
L8: Double-headed button	3: Flush button 4: Flush button + high button	2: Red + Green	5: 1NO&1NC
W1: illuminated reset high button W3: illuminated button W4: illuminated mushroom-headed reset button Letter "Z" behind is self-locking	1: White 2: Black 3: Green 4: Red 5: Yellow 6: Blue	4: 220V transformer type 5: 380V transformer type 6: Direct 8: RC type	1: 1NO 2: 1NC 3: 2NO 4: 2NC 5: 1NO&1NC

Type code	Assistant specification code		
W8: illuminated Double-headed button	3: Flush button 4: Flush button + high button	4: 220V transformer type 5: 380V transformer type 6: Direct type 8: RC type	5: 1NO&1NC
K1: Knob with lamps	2: Two position locked 3: Three position locked	1: white 3: green 4: red 5: yellow 6: blue 4: 220V transformer type 5: 380V transformer type 6: Direct type 8: RC type	1: 1NO 2: 1NC 3: 2NO 4: 2NC 5: 1NO&1NC
V: Indicator light	4: 220V transformer type 5: 380 transformer type 6: Direct type 8: RC type	1: White 3: Green 4: Red 5: Yellow 6: Blue	
V1: Economic indicator light	6: Direct type	1: White 3: Green 4: Red 5: Yellow 6: Blue	
BE101(no construction code) BE102(no construction code)	NO contact NC contact		

ANNEX

CB TEST CERTIFICATE

Ref. Certificate No. NL-19585

Page 4 of 6

Direct type voltage: LED:AC/DC 6 V, 12 V, 24 V, 36 V, 48 V, 110 V, 220 V, 230 V, 240 V, 380 V.
 incandescent lamp: AC/DC 6 V, 12 V, 24 V, 36 V, 48 V,
 neon lamp : AC/DC 110 V, 220 V, 230 V, 240 V, 380 V.
 RC-type voltage: AC 220 V, AC 380 V.

Type code of button with box (No construction code)	Meaning of the type code		
	Configure	Sign	Color of the cover
B101H29	Green flush button, 1NO	Scutcheon sign: START	French grey
B102	Green flush button, 1NO	Push button sign: I	French grey
B103	Green flush button, 1NO	Push button sign: START	French grey
B111H29	Red flush button, 1NC	Scutcheon sign: STOP	French grey
B112	Red flush button, 1NC	Push button sign: O	French grey
B114	Red flush button, 1NC	Push button sign: STOP	French grey
B174H29	Red ϕ 40 mushroom button self-locking, knob reset, 1NC	Scutcheon sign: STOP	French grey
J174 H29	Red ϕ 40 mushroom button self-locking, knob reset, 1NC	Scutcheon sign: STOP	yellow
J174	Red ϕ 40 mushroom button self-locking, knob reset, 1NC		yellow
J184	Red ϕ 40 mushroom button self-locking, key reset, 1NC		yellow
B132H29	Two positions locking knob, 1NO	Scutcheon sign: STOP, START	French grey
B142H29	Two positions locking key button, 1NO	Scutcheon sign: STOP, START	French grey
B211H29	Green flush button 1NO Red flush button 1NC	Scutcheon sign: START, STOP	French grey
B213	Green flush button 1NO Red flush button 1NC	Push button sign: I O	French grey

ANNEX

CB TEST CERTIFICATE

Ref. Certificate No. NL-19585

Page 5 of 6

B215	Green flush button 1NO Red flush button 1NC	Push button sign: START, STOP	French grey
B222	White flush button 1NO Black flush button 1NO	Push button sign: ↑ ↓	French grey
B223	White flush button 1NO Black flush button 1NO	Push button sign: → ←	French grey
B311H29	green flush button 1NO red flush button 1NC green flush button 1NO	scutcheon sign: FORWARD, STOP, REVERSE	French grey
B321H29	green flush button 1NO red flush button 1NC green flush button 1NO	scutcheon sign: UP, STOP, DOWN	French grey
B341H29	green flush button 1NO red flush button 1NC green flush button 1NO	scutcheon sign: OPEN, STOP, CLOSE	French grey
B339	green flush button 1NO red flush button 1NC black flush button 1NO	push button sign: I ○ II	French grey
B324	white flush button 1NO red flush button 1NC black flush button 1NO	push button sign: ↑ ○ ↓	French grey
B334	white flush button 1NO red flush button 1NC black flush button 1NO	push button sign: → ○ ←	French grey
B361H29	Red pilot lamp, 220V neon lamp, direct type green flush button 1NO red flush button 1NC	Scutcheon sign: START, STOP	French grey

ANNEX

CB TEST CERTIFICATE

Ref. Certificate No. NL-19585

Page 6 of 6

B363	Red pilot lamp, 220V neon lamp, direct type green flush button 1NO red flush button 1NC	push button sign: I ○	French grey
B366	Red pilot lamp, 220V neon lamp, direct type green flush button 1NO red flush button 1NC	Push button sign : START, STOP	French grey
B0, B02, B03	Empty boxes, of which there is one hole, two holes and three holes.		
enclosure: normally opened contact, normally closed contact			